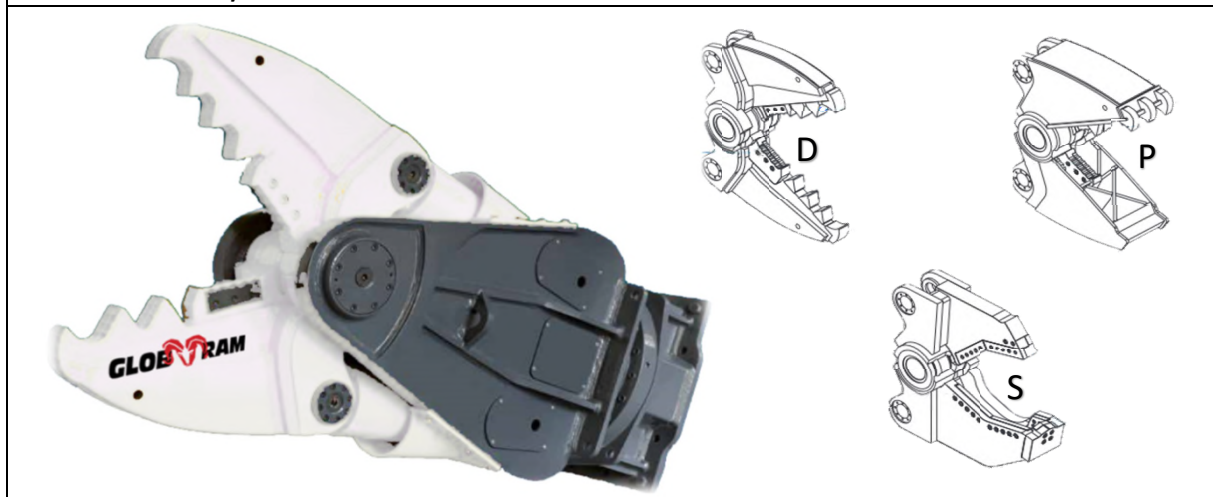


MULTIPROCESSOR / 3-SERIES


| GLOBRAM MULTIPROCESSOR, 3-SERIES | | RM 318 | RM 328 | RM 332 | RM 342 | RM 352 |
|------------------------------------|-------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Excavator weight min | tons | 12 | 17 | 20 | 28 | 38 |
| Excavator weight max | tons | 24 | 36 | 45 | 55 | 65 |
| Excavator weight optimum min | tons | 14 | 20 | 24 | 30 | 42 |
| Excavator weight optimum max | tons | 24 | 36 | 45 | 55 | 65 |
| Width | mm | 425 | 475 | 495 | 590 | 640 |
| Oil delivery min | l/min | 150 | 180 | 200 | 220 | 270 |
| Oil delivery max | l/min | 250 | 250 | 300 | 320 | 370 |
| Max. working pressure | bar | 350 | 400 | 400 | 400 | 400 |
| Min. closure time | sec | 2 | 2,5 | 3 | 4 | 4 |
| Min. opening time | sec | 1 | 1,2 | 1,5 | 2 | 2 |
| Hydraulic connections open/close | inch | 3 / 4" | 3 / 4" | 3 / 4" | 1" | 1" |
| Max. rotation flow | l/min | 20 | 25 | 25 | 30 | 30 |
| Max. rotation pressure | bars | 110 | 11 | 110 | 110 | 110 |
| Hydraulic connections for rotation | inch | 1 / 2" | 1 / 2" | 1 / 2" | 1 / 2" | 1 / 2" |
| Cradle plate compatibility | | RM 120 - 130 | RM 140 - 150 | RM 140 - 150 | RM 160 | RM 180 - 195 |
| Cradle plate dimensions | mm | 640 x 480 12 x Ø 22 | 730 x 550 12 x Ø 27 | 730 x 550 12 x Ø 27 | 750 x 750 12 x Ø 30 | 740 x 740 12 x Ø 39 |

| DEMOLITION JAWS | | RM 318D | RM 328D | RM 332D | RM 342D | RM 352D |
|---|-----|---------|---------|---------|---------|---------|
| Attachment operating weight (incl. bracket) | kg | 1500 | 2080 | 2400 | 3500 | 4500 |
| Height | mm | 1900 | 2120 | 2290 | 2450 | 2660 |
| Max. opening | mm | 815 | 910 | 1050 | 1150 | 1250 |
| Jaw depth | mm | 595 | 660 | 760 | 860 | 930 |
| Cutter blade length | mm | 180 | 180 | 180 | 180 | 180 |
| Max. clamping force at tip | ton | 50 | 60 | 95 | 110 | 130 |
| Max. clamping force at shears | ton | 230 | 270 | 340 | 390 | 460 |

| PULVERIZER JAWS | | RM 318P | RM 328P | RM 332P | RM 342P | RM 352P |
|---|-----|---------|---------|---------|---------|---------|
| Attachment operating weight (incl. bracket) | kg | 1500 | 2080 | 2450 | 3600 | 4700 |
| Height | mm | 1856 | 2070 | 2280 | 2500 | 2730 |
| Max. opening | mm | 717 | 800 | 850 | 1050 | 1150 |
| Jaw depth | mm | 574 | 640 | 700 | 870 | 950 |
| Cutter blade length | mm | 180 | 180 | 180 | 180 | 180 |
| Max. clamping force at tip | ton | 50 | 65 | 90 | 110 | 130 |
| Max. clamping force at shears | ton | 225 | 280 | 340 | 430 | 480 |

| STEEL SHEAR JAWS | | RM 318S | RM 328S | RM 332S | RM 342S | RM 352S |
|---|-----|---------|---------|---------|---------|---------|
| Attachment operating weight (incl. bracket) | kg | 1600 | 2200 | 2600 | 3700 | 4900 |
| Height | mm | 1950 | 2170 | 2340 | 2515 | 2760 |
| Max. opening | mm | 450 | 500 | 550 | 640 | 700 |
| Jaw depth | mm | 500 | 550 | 620 | 710 | 780 |
| Cutter blade length | mm | 180 | 540 | 600 | 180 | 720 |
| Max. clamping force at tip | ton | 55 | 70 | 90 | 120 | 140 |
| Max. clamping force at shears | ton | 220 | 270 | 330 | 420 | 460 |