


**COMPACTOR FIXED / 6-SERIES**

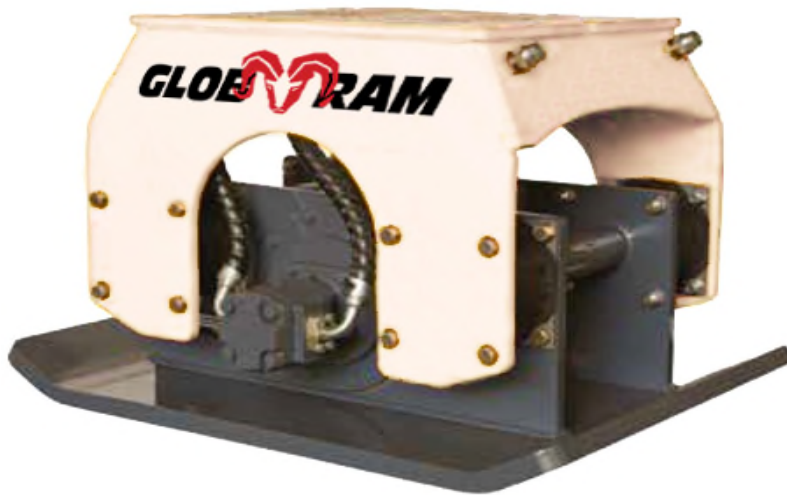

GLOBRAM COMPACTORS fixed, 6-SERIES		RM 606	RM 609	RM 612	RM 618	RM 630
Excavator weight min	tons	1,7	3,5	4	8	15
Excavator weight max	tons	8	13	14	22	45
Excavator weight optimum min	tons	1,7	3,5	4	8	15
Excavator weight optimum max	tons	8	13	14	22	45
Attachment operating weight (incl. bracket)	kg	200	445	485	970	1280
Height	mm	56	60	60	79	80
Baseplate	mm	30x76	46x84	64x87	71x120	90x122
Centrifugal force	kN	3000 , 29.5	4000 , 39	4000 , 39	10000 , 98	17000 , 167
Compacting force	N/cm <sup>2</sup>	16,7	10,8	10,8	17,7	21,6
Oil flow to motor	l/min	45 - 70	75	75	120	190 - 265
Max. working pressure	bar	200	200	200	200	200
Cradle plate compatibility		RM 56	RM 88	RM 88	RM 110 - 115	RM 120 - 130 RM 140 - 150*
Cradle plate dimensions	mm	275 x 356 10 x Ø 17	430 x 360 12 x Ø 22	430 x 360 12 x Ø 22	750 x 750 12 x Ø 30	640 x 480 12 x Ø 22 730 x 550* 12 x Ø 27*

\* optional