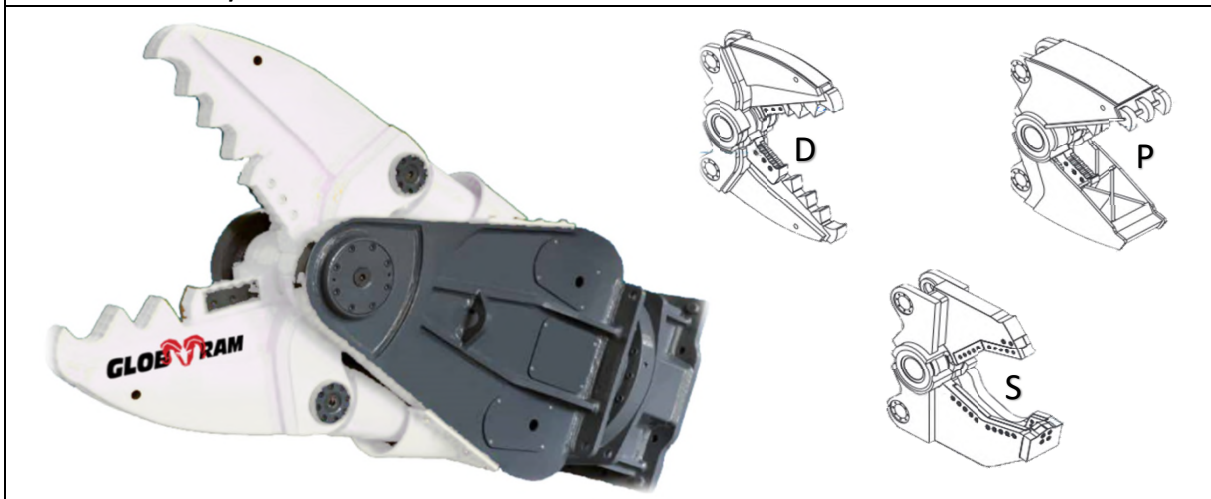


**MULTIPROCESSOR / 3-SERIES**


GLOBRAM MULTIPROCESSOR, 3-SERIES		RM 318	RM 328	RM 332	RM 342	RM 352
Excavator weight min	tons	12	17	20	28	38
Excavator weight max	tons	24	36	45	55	65
Excavator weight optimum min	tons	14	20	24	30	42
Excavator weight optimum max	tons	24	36	45	55	65
Width	mm	425	475	495	590	640
Oil delivery min	l/min	150	180	200	220	270
Oil delivery max	l/min	250	250	300	320	370
Max. working pressure	bar	350	400	400	400	400
Min. closure time	sec	2	2,5	3	4	4
Min. opening time	sec	1	1,2	1,5	2	2
Hydraulic connections open/close	inch	3 / 4"	3 / 4"	3 / 4"	1"	1"
Max. rotation flow	l/min	20	25	25	30	30
Max. rotation pressure	bars	110	11	110	110	110
Hydraulic connections for rotation	inch	1 / 2"	1 / 2"	1 / 2"	1 / 2"	1 / 2"
Cradle plate compatibility		RM 120 - 130	RM 140 - 150	RM 140 - 150	RM 160	RM 180 - 195
Cradle plate dimensions	mm	640 x 480 12 x Ø 22	730 x 550 12 x Ø 27	730 x 550 12 x Ø 27	750 x 750 12 x Ø 30	740 x 740 12 x Ø 39

DEMOLITION JAWS		RM 318D	RM 328D	RM 332D	RM 342D	RM 352D
Attachment operating weight (incl. bracket)	kg	1500	2080	2400	3500	4500
Height	mm	1900	2120	2290	2450	2660
Max. opening	mm	815	910	1050	1150	1250
Jaw depth	mm	595	660	760	860	930
Cutter blade length	mm	180	180	180	180	180
Max. clamping force at tip	ton	50	60	95	110	130
Max. clamping force at shears	ton	230	270	340	390	460

PULVERIZER JAWS		RM 318P	RM 328P	RM 332P	RM 342P	RM 352P
Attachment operating weight (incl. bracket)	kg	1500	2080	2450	3600	4700
Height	mm	1856	2070	2280	2500	2730
Max. opening	mm	717	800	850	1050	1150
Jaw depth	mm	574	640	700	870	950
Cutter blade length	mm	180	180	180	180	180
Max. clamping force at tip	ton	50	65	90	110	130
Max. clamping force at shears	ton	225	280	340	430	480

STEEL SHEAR JAWS		RM 318S	RM 328S	RM 332S	RM 342S	RM 352S
Attachment operating weight (incl. bracket)	kg	1600	2200	2600	3700	4900
Height	mm	1950	2170	2340	2515	2760
Max. opening	mm	450	500	550	640	700
Jaw depth	mm	500	550	620	710	780
Cutter blade length	mm	180	540	600	180	720
Max. clamping force at tip	ton	55	70	90	120	140
Max. clamping force at shears	ton	220	270	330	420	460